


EDOM DALI



OPRAWY LED

CZ: LED svítidlo/ SK: LED svetidlo/ EN: LED lamp

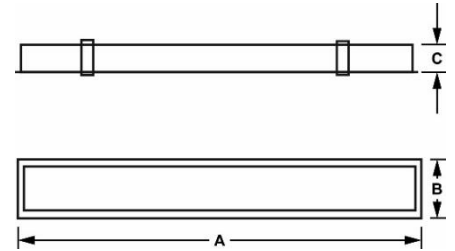

A

B



	INDEX	ABC	⚡	💡 Lm	💡 Lm	Tc[K]	📐	PF	📏	📏	📏	📏	📏
A	004736	Edom LED	24 W	1872 lm	78 lm/W	4000K	Biały Bílá Bielá White	0.9	600	90	70	5902216716940	
A	000509	Edom LED	40 W	3120 lm	78 lm/W	4000K		0.9	1200	90	70	5902216720954	
B	006050	Edom LED	24 W	1872 lm	78 lm/W	4000K	Czarny Černá Čierny Black	0.9	600	90	70	5902216788701	
B	008458	Edom LED	40 W	3120 lm	78 lm/W	4000K		0.9	1200	90	70	5902216720947	

AC 230V	SMD LED	120°	DALI
80	20	06	21

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa