


HARGO AC LED



NAŚWIETLACZ LED

CZ: vedl světlomet / SK: vedie svetlomet / EN: LED floodlight

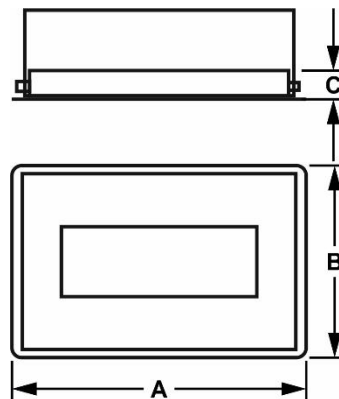

INDEX	ABC				Tc[K]		A [mm]	B [mm]	C [mm]	
007663	Hargo LED	50 W	4250 lm	85 lm/W	4500 K	Czarny Černá Čierny Black	245	170	28	5902216725393
007736	Hargo LED	50 W	4250 lm	85 lm/W	6500 K		245	170	28	5902216725416
012643	Hargo LED	100 W	8500 lm	85 lm/W	4500 K		351	262	45	5902216797505
007735	Hargo LED	100 W	8500 lm	85 lm/W	6500 K		351	262	45	5902216725409

AC 230V	SMD LED	120°	
CRi(Ra)	IP	IK	
70	65	07	

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -10°C do +25°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -10 ° C to + 25 ° C

humidity: <85% pressure: 690-1060 hPa

Brolux