


KONAN UGR<19



PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel

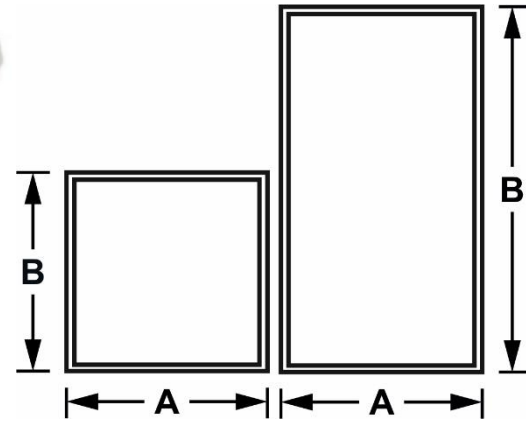

INDEX	ABC											A [mm]	B [mm]		
013285	Konan LED	28W	4216 lm	151 lm/W	4000 K	0,9	Biały biela white	595	595			595	595		5902808800927
013283	Konan LED	28W	4379 lm	156lm/W	4000 K	0,9		595	595	Samsung		595	595		5902808800934

AC 230V	SMD LED	120°	
CRI(Ra) >80	IP 20	IK 03	

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

Brolux