

STEROWANE MANUALNIE



WZMACNIACZE, KONTROLERY LED RGB

CZ: LED kontroléry / SK: LED kontroléry / EN: LED controllers




A




B



C



D

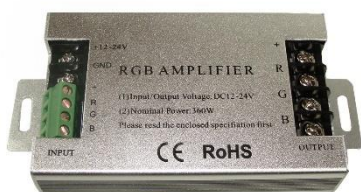


E



G



H



	INDEX	IN	(full/1channel)	(12V/24V)	dot	(30/m, 60/m - 12V)	temperature	L x W x H	barcode
A	6281	12÷24VDC	24A / 8A	288W / 576W	5 + ring dot.	(30/m, 60/m - 12V)	-20°C ÷ +60°C	86x86x25mm	5902216735545
B	1324	12÷24VDC	12A / 4A	144W / 288W	3	40m / 20m	-20°C ÷ +60°C	130x40x30mm	5902216746251
C	6286	12÷24VDC	24A / 8A	288W / 576W	-	20m / 10m	-20°C ÷ +60°C	82x61x28mm	5902216714236
D	5826	12÷24VDC	6A / 2A	72W / 144W	3	30m / 15m	-20°C ÷ +60°C	41x12x3mm	5902216755529
E	009620	12÷24VDC	10A		-	-	-20°C ÷ +60°C	100x65x28mm	5902216722002
F	5980	12÷24VDC	18A / 6A	216W / 432W	13+ 2x ring	-	-20°C ÷ +60°C	85x45x23mm	5902216711556
G	5337	12VDC	6A		-	-	-20°C ÷ +60°C	41x12x3mm	5902216784956
H	6134	-	-	-	9 + ring dot.	-	-20°C ÷ +60°C	80x40x15mm	5902216711549

