


KRIS RA>90

PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel

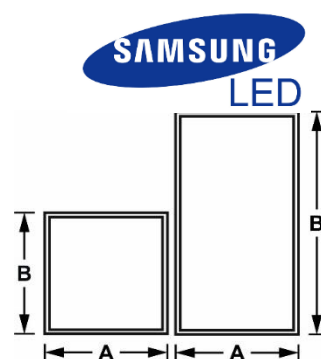

INDEX	ABC				PF	UGR		A [mm]	B [mm]	C [mm]	
045472	Kris LED	40 W	100lm/W	3000 K	0,9			295	1195	35	5902808808954
045473	Kris LED	40 W	150lm/W	3000 K	0,9			295	1195	35	5902808809951
045435	Kris LED	40 W	150lm/W	4000 K	0,9			295	1195	35	
045475	Kris LED	40W	100 lm/W	4000 K	0,9			595	595	35	5902808808978
045436	Kris LED	40 W	100lm/W	4000 K	0,9	<19		595	595	35	
045476	Kris LED	40 W	150lm/W	4000 K	0,9	<19		595	595	35	

AC 230V	SMD LED	120	
>90	40000 h	20	

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C do +60°C

humidity: <85% pressure: 690-1060 hPa

BroLux