


# KRISROUND

## PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel

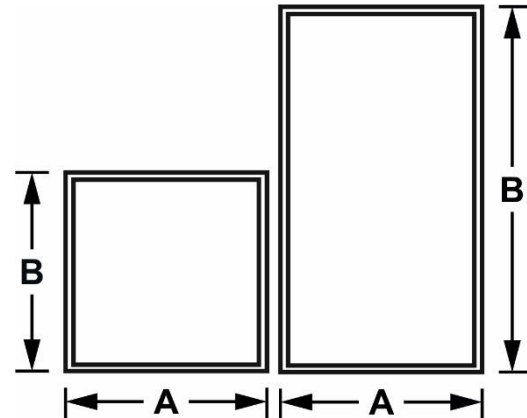

INDEX	ABC					PF		A [mm]	B [mm]	
046005	Krisround LED	40W	4000 lm	100lm/W	4000K	>0.9	Biały biła bielá white	595	595	5902808811794

AC 230V	SMD LED	120°	IP
CRI/Ra	40000 h	20	RoHS COMPLIANT
>80			

### Materiał / Material / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

### Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

**Br**olux

www.bowi.com.pl