

LACO LED



ŽARÓVKI LED


CZ: LED žárovky / SK: LED žiarovky / EN: LED bulbs



A



B

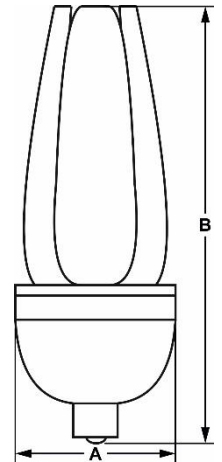

| | INDEX | ABC | | | | Tc[K] | | | A [mm] | B [mm] | |
|---|--------|----------|-------|----------|----------|--------|---------------------------------|-----|--------|--------|---------------|
| A | 011877 | LACO LED | 50 W | 6000 lm | 120 lm/W | 4500 K | Biely bílá biely white | E40 | 90 | 260 | 5902216787735 |
| B | 011878 | LACO LED | 100 W | 12000 lm | 120 lm/W | 4500 K | | | 120 | 310 | 5902216787742 |

| | | | |
|---------|---------|-----------|-----------|
| | | | |
| AC 230V | SMD LED | 270° | |
| | | IP | PF |
| >80 | 35000 h | 65 | >0,5 |
| | | | |

Materiál / Materiál / Material

PL: termoplastik, aluminium

CZ: termoplast, hliník

SK: termoplast, hliník

EN: thermoplastic, aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -10°C do +25°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -10 ° C to + 25 ° C

humidity: <85% pressure: 690-1060 hPa

Brulux