


MACAWI - AC LED




LAMPA ULICZNA LED

CZ: LED pouliční lampa/ SK: LED pouličné lampy/ EN: LED street lamp

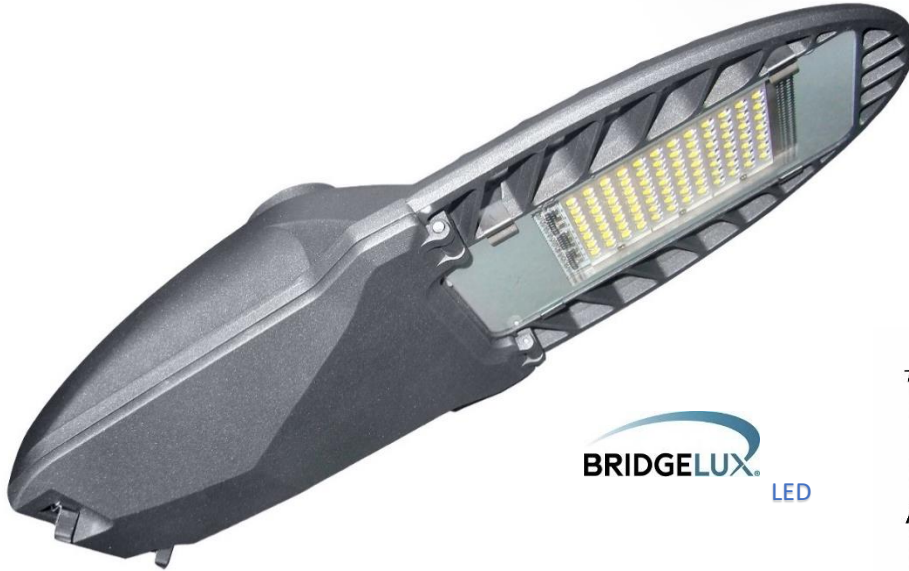

BRIDGELUX LED

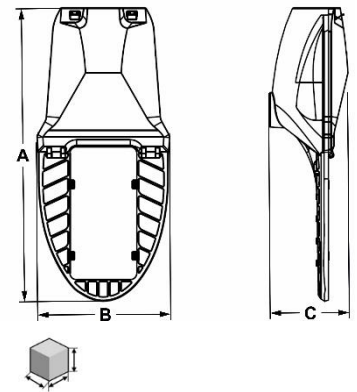

INDEX	ABC			PF	Tc[K]		A [mm]	B [mm]	C [mm]	
004557	ACLED Macawi	50W	120 lm/W	≥0.95	4500 K	Szary Šedá Šedý Grey	535	242	140	5902216720831
004483	ACLED Macawi	75W	110 lm/W	≥0.95	4500 K		535	242	140	5902216720848
004486	ACLED Macawi	100W	110 lm/W	≥0.95	4500 K		535	242	140	5902216720855
012114	ACLED Macawi	100W	110 lm/W	≥0.95	6500 K		535	242	140	5902216791411

AC 230V	SMD LED	120°/60°	NON-DIM
70	50000 h	65	IN&OUT

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -10°C do +25°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -10 ° C to + 25 ° C

humidity: <85% pressure: 690-1060 hPa

BroLux

www.bowi.com.pl