


# TIMAN




## PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel

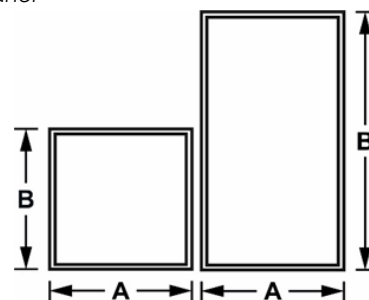

INDEX	ABC		Lm	Lm	Tc[K]		PF	A [mm]	B [mm]	
002667	Timan LED	60 W	5200 lm	87 lm/W	3000 K	Biały bílá biela white	>0.9	595	595	5902216709607
1183	Timan LED	60 W	5200 lm	87 lm/W	4500 K		>0.9	595	595	5902216709591
012361	Timan LED	60 W	5200 lm	87 lm/W	6500 K		>0.9	595	595	5902216794801

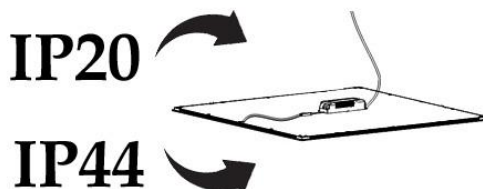

AC 230V	SMD LED	120°	
>80	40000 h	20 / 44	

### Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

### Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

Br**o**lux