


TIMAN PQ



PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel

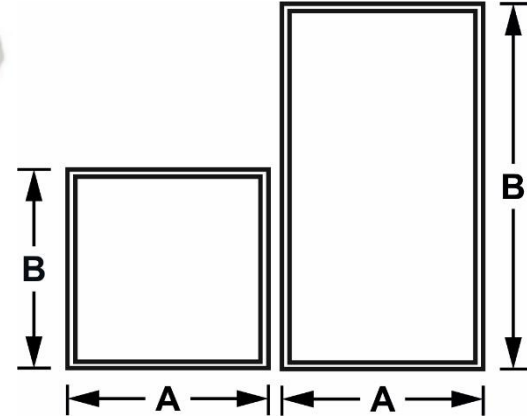

INDEX	ABC					UGR		A [mm]	B [mm]	
012819	Timan LED	40 W	4320 lm	108lm/W	4000 K	<19	Biały bílá biely white	595	595	5902216797659
012563	Timan LED	40 W	4400 lm	110 lm/W	4000 K			595	595	5902216796607

AC 230V	SMD LED	120°	
>80	20	03	
0,9			

Uwagi / Komentář / Komentáre

PL: Żywołność 60000 godzin

CZ: Životnost 60000 hodin

SK: Životnosť 60000 hodín

EN: Durability 60000 hours

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Uwagi / Komentář / Komentáre

PL: Gwarancja 5 lat

CZ: Záruka 5letá

SK: Záruka 5 rokov

EN: 5-year warranty

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

