


# TIMAN RA>90



## PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel

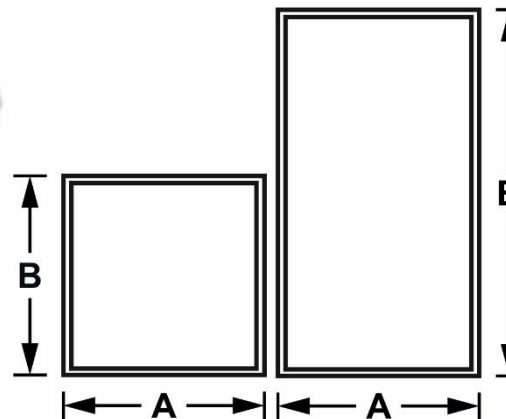

INDEX						PF		A [mm]	B [mm]	
012450	Timan LED	40W	3915 lm	98lm/W	4000K	>0.9	Biały bílá biely white	595	595	5902216795501

AC 230V	SMD LED	120°	
CRi(Ra)	IP	IK	
>90	20	03	
CE	RoHS COMPLIANT		

### Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

### Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

### Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -10°C do +25°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -10 ° C to + 25 ° C

humidity: <85% pressure: 690-1060 hPa

BroLux

www.bowi.com.pl