


TIMAN PQ DALI



PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel

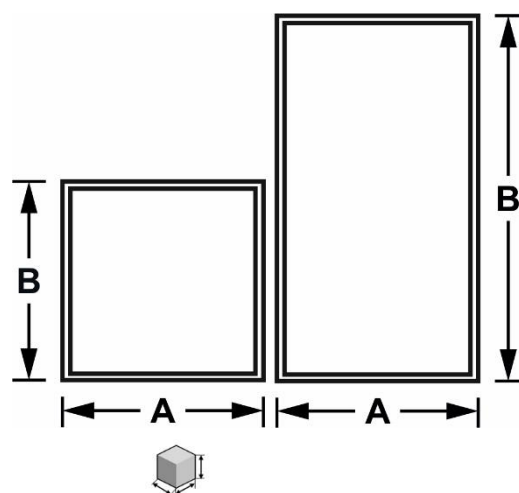

INDEX	ABC				Tc[K]	PF		A [mm]	B [mm]	
013030	Timan LED	40 W	4000 lm	100lm/W	4000 K	0,9	Biały biła white	595	595	5902216796478
013032	Timan LED	48 W	4800 lm	110lm/W	4000 K	0,9		595	595	5902216796485

AC 230V	SMD LED	120°	DALI
>80	40000 h	20	

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

