


TIMAN UGR<19



PANELE LED

CZ: LED panely/ SK: LED panely/ EN: LED panel

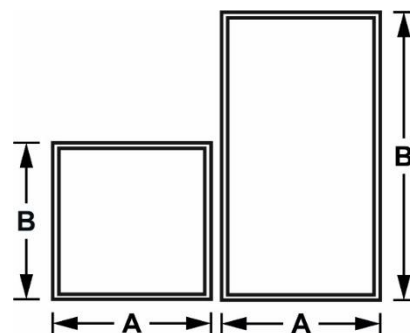

INDEX	ABC				Tc[K]	PF		A [mm]	B [mm]	
013280	Timan LED	40W	3434 lm	86 lm/W	4000K	>0.9	Biały bílá bielá white	595	595	5902808800675

AC 230V	SMD LED	120°	IP
80	40000 h	20	

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -25°C do +60°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -25°C do +60°C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -25°C do +60°C

vlhkosť: <85% tlak: 690-1060 hPa

EN: temperature: from -25°C to +60°C

humidity: <85% pressure: 690-1060 hPa

Br**o**lux