


## OPRAWY LED

CZ: LED svítidlo / SK: LED svetidlo / EN: LED lamp



# OSRAM

LED

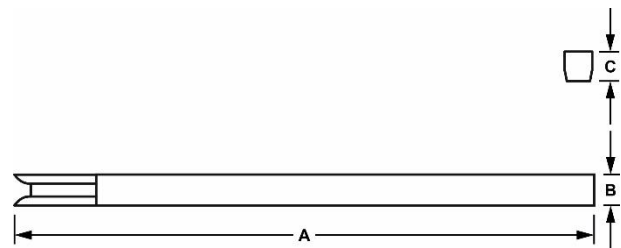

INDEX	ABC				Tc[K]			A [mm]	B [mm]	C [mm]	
012655	Tonnor LED	60 W	8400 lm	140lm/W	4000 K	Biały	90°	1442	65	69	5902216797116
012656	Tonnor LED	60 W	8400 lm	140lm/W	4000 K	bielá biely white	60°	1442	65	69	5902216797109



PF

AC 230V

SMD LED

>0,95



IP

80

40000H

20



Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Materiał / Materiál / Material

PL: tworzywo sztuczne PC, aluminium

CZ: PC plast, hliník

SK: PC plast, hliník

EN: PC plastic, aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -10°C do +25°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -10 ° C to + 25 ° C

humidity: <85% pressure: 690-1060 hPa