











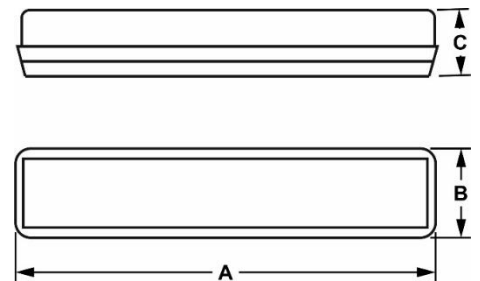









# VOLTER TRANSPARENT

## OPRAWY LED

CZ: LED svítidlo/ SK: LED svietidlo/ EN: LED lamp



INDEX							A [mm]	B [mm]	C [mm]	
012111	Volter LED	40W	4600 lm	115 lm/W	4000K	Transparentny Průhledný Priehľadný Transparent	1190	85	72	5902216791633

			
AC 230V	SMD LED	120°	
			
IP 65	PF 0,9	IK 10	CRI/Ra 80
			

Uwagi / Komentář / Komentáre

PL: Zasilacz w komplecie

CZ: Napájení je součástí dodávky

SK: Napájanie je súčasťou dodávky

EN: Power supply included

Materiał / Materiál / Material

PL: Tworzywo sztuczne PC

CZ: PC Plast

SK: PC Plast

EN: PC Plastic

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -10°C do +25°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -10 ° C do + 25 ° C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -10 ° C to + 25 ° C

humidity: <85% pressure: 690-1060 hPa

